




Door/Gate Controller Spec Sheet

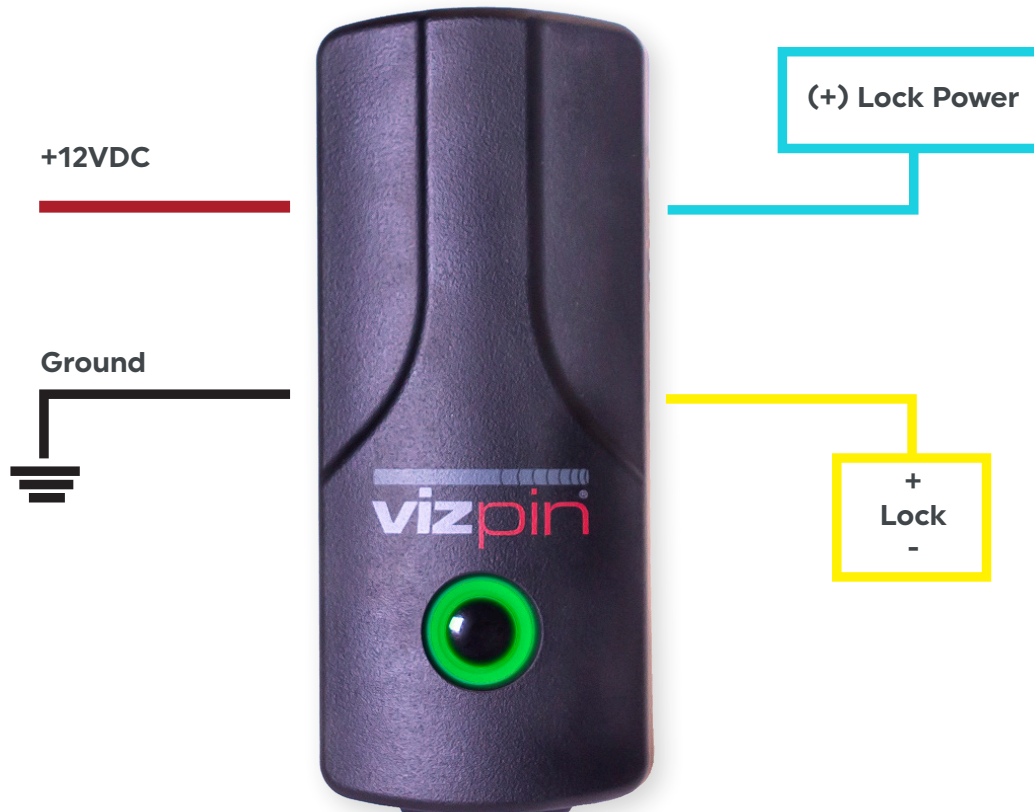

Wiring Chart*

12VDC	Red
Ground	Black
Relay Output (COM)	Yellow
Relay Input**	Blue
Wiegand Data (0)	Green
Wiegand Data (1)	White
Buzz-in (Door strike/NO)	White/Brown

*Wires not listed are for future use.

**NC = Normally Closed & Fail Safe, NO = Normally Open & Fail Secure.

Specifications

Power Input	12VDC, 20mA average
IP/NEMA	IP54
Relay	750mA 12-24 VAC/VDC
Operating Temperature	-40° to +85° (-40°F) to (+185°F)
Dimensions	4.0 in. x 1.3 in. x 0.8 in. 101mm x 34mm x 20mm
Certifications & Approvals	FCC & CE
Weight	1.6 oz (46 grams)

All Entegrity Smart systems can be configured for fail secure or fail safe operations to adhere with UL and other industry safety standards.