



# Door/Gate Controller vPROX Installation Guide



## 1. Before You Go On Site


- a. Ensure the your Entegrity Smart Device is registered on an account and you have a smartkey to it.
- b. Install the VIZpin Smart app on your phone.
- c. Connect 12VDC to the Door/Gate Controller and make sure the LED is gently pulsing red.
- d. In the Smart app, tap "Open" on your Smartkey to trigger the controller. The LED may turn purple. If it does, refresh the VIZpin Smart app and use the Smartkey again. Repeat this until the LED turns green.

## 2. Once on Site

- a. Connect the controller's red wire to positive [+] on your +12VDC PS or to the panel providing 12VDC.
- b. Connect the controller's black wire to negative [-] on your +12VDC PS or the panel providing 12VDC.
- c. Connect the controller's green wire to the Wiegand D0 input.
- d. Connect the controller's white wire to the Wiegand D1 input.



## Wiring a vPROX Reader to an Access Control Panel with 12VDC Readers

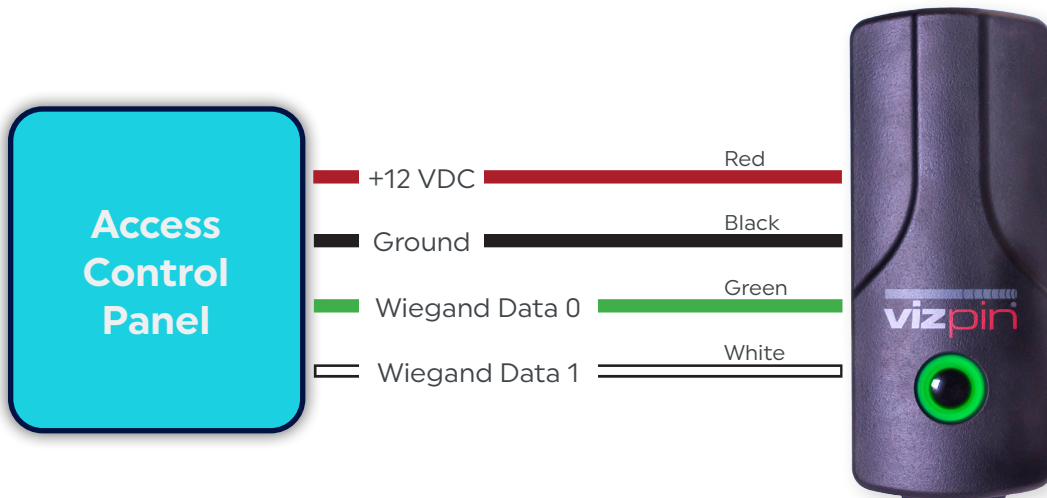

## Wiring a vPROX Reader to an Access Control Panel with Readers that are Not 12VDC

