



Entegrity Smart Video Intercom

Video Intercom

The Entegrity Smart Video Intercom easily and affordably turns any door or gate into a visitor management system. Remotely unlock doors and gates for visitors, contractors, and delivery people. Perfect for buildings, gates, package rooms, and more. And - it's all managed right from your smartphone.

- Multi-Tenant Video Intercom
- Works with Video Intercom Panel or Mobile App
- Verify the visitor before letting them in with two-way calling
- Simple setup and easy to use - no special programming or training
- Residents answer calls and let visitors in from their mobile device
- Keep a record of every visitor
- Powerful integrations with Property Management software
- Affordable options for any budget
- Works with any smart device that is powered by VIZpin including Door/Gate Controllers, Smart Locks, and Solar Kits



Video Intercom Panel


Vandal-resistant touchscreen panel that only requires power and an internet connection so it's ready to use out of the box.

- Sleek design and intuitive interface
- Ruggedly built for any environment

Mobile App

Use the Entegrity Smart Intercom app to gain access. Visitors access the directory and place a video call right from their own phone, and residents can unlock the door.

- Available for Android & iOS
- No network or additional hardware required at the door
- Utilizes Bluetooth to unlock

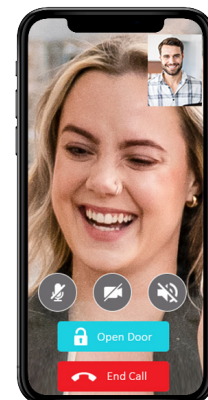

Access Control & Visitor Management for Your Entire Property

EntegritySmart.com



Video Intercom Panel

Physical and Power

Front Panel	316 Grade Stainless Steel
Main Camera	2M Pixels, with Starlight
Ethernet	1xRJ45, 10/100Mbps adaptive
IEEE	802.3 at PoE+
Power Input	12-24VDC Connector (If not using PoE+)
Installation	Flush Mounted & Wall Mounted

Dimensions

Screen Display	8 Inch IPS LCD
Flush Mounted Dimensions	13.8x5.1x2.1 in (350x130x53.9 mm)
Wall Mounted Dimensions	13.8x5.1x1.6 in (350x130x41.6 mm)
Weight	5 lbs. (2.3 kg)

Environmental

IP & IK Level	IP65 & IK10
Working Humidity	10~90%
Working Temperature	-30°C - +60°C
Storage Temperature	-30°C - +70°C

Video

Video Resolution	Up to 1920x1080p
Viewing Angle	115°(H) / 63°(V)
Minimum Illumination	0.1LUX

Maintenance

OTA Firmware Upgrade



Access Control & Visitor Management for Your Entire Property

EntegritySmart.com